


10039604 040102
JCN2 Rec'd PCT/PTO 01 APR 2002

FORM PTO 1390 (REV 5-93)		US DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY DOCKET NUMBER 2002_0395A	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. §371				U.S. APPLICATION NO. (if known, see 37 CFR 1.52) 10/089604	
International Application No. PCT/JP00/06990		International Filing Date October 6, 2000		Priority Date Claimed October 8, 1999	
Title of Invention FORMALDEHYDE GAS STERILIZER					
Applicant(s) For DO/EO/US Tomohiko HASHIBA					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. §371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. §371. 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. §371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. §371(b) and PCT Articles 22 and 39(1). 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. §371(c)(2)) a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau. ATTACHMENT A c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US) 6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. §371(c)(2)). ATTACHMENT B 7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. §371(c)(3)). a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19. 9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. §371(c)(4)) with Cover Letter - ATTACHMENT C 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. §371(c)(5)). Items 11. to 14. below concern other document(s) or information included: 11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. 12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. ATTACHMENT D 13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. ATTACHMENT E <input checked="" type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. ATTACHMENT F 14. <input checked="" type="checkbox"/> Other items or information: - Notification Concerning Submission or Transmittal of Priority Document - ATTACHMENT G					
THE COMMISSIONER IS AUTHORIZED TO CHARGE ANY DEFICIENCY IN THE FEES FOR THIS PAPER TO DEPOSIT ACCOUNT NO. 23-0975					

U.S. APPLICATION NO. 10/089604 <small>(OPTIONAL - 37 CFR 1.53)</small>		INTERNATIONAL APPLICATION NO. PCT/JP00/06990		ATTORNEY'S DOCKET NO. 2002 0395A					
15. <input checked="" type="checkbox"/> The following fees are submitted BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)): Neither international preliminary examination fee nor international search fee paid to USPTO and International Search Report not prepared by the EPO or JPO \$1040.00 International Search Report has been prepared by the EPO or JPO \$ 890.00 International preliminary examination fee not paid to USPTO but international search paid to USPTO \$ 740.00 International preliminary examination fee paid to USPTO but claims did not satisfy provisions of PCT Article 33(1)-(4) \$ 690.00 International preliminary examination fee paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$ 100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =				<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:50%;">CALCULATIONS</th> <th style="width:50%;">PTO USE ONLY</th> </tr> <tr> <td style="height: 100px;"></td> <td></td> </tr> </table>		CALCULATIONS	PTO USE ONLY		
CALCULATIONS	PTO USE ONLY								
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$					
Claims	Number Filed	Number Extra	Rate						
Total Claims	6 - 20 =	0	X \$18.00	\$					
Independent Claims	3 - 3 =	0	X \$84.00	\$					
Multiple dependent claim(s) (if applicable)			+ \$280.00	\$					
TOTAL OF ABOVE CALCULATIONS =				\$890.00					
<input type="checkbox"/> Small Entity Status is hereby asserted. Above fees are reduced by 1/2.				\$					
SUBTOTAL =				\$890.00					
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				+ \$					
TOTAL NATIONAL FEE =				\$890.00					
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40 per property +				\$					
TOTAL FEES ENCLOSED =				\$890.00					
				Amount to be refunded	\$				
				Amount to be charged	\$				
a. <input checked="" type="checkbox"/> A check in the amount of \$890.00 to cover the above fees is enclosed. A duplicate copy of this form is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. 23-0975 in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 23-0975.									
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.									
19. CORRESPONDENCE ADDRESS <div style="text-align: center;">  000513 <small>PATENT TRADEMARK OFFICE</small> </div>			By: <u>Charles R. Watts</u> Charles R. Watts, Registration No. 33,142 WENDEROTH, LIND & PONACK, L.L.P. 2033 "K" Street, N.W., Suite 800 Washington, D.C. 20006-1021 Phone: (202) 721-8200 Fax: (202) 721-8250 April 1, 2002						

10089604 040302

THE COMMISSIONER IS AUTHORIZED
TO CHARGE ANY DEFICIENCY IN THE
FEES FOR THIS PAPER TO DEPOSIT
ACCOUNT NO. 23-1973

10/089604
JC10 Rec'd PCT/PTO 01 APR 2002

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of :
Tomohiko HASHIBA : Attn: BOX PCT
Serial No. NEW : Docket No. 2002_0395A
Filed April 1, 2002 :
FORMALDEHYDE GAS STERILIZER
[Corresponding to PCT/JP00/06990
Filed October 6, 2000]

SECOND PRELIMINARY AMENDMENT

Assistant Commissioner for Patents,
Washington, DC 20231

Sir:

Please amend the above-identified application as follows.

In the Claims:

Kindly amend claims 1, 2 and 3 as follows.

1. (Amended) A formaldehyde gas disinfection apparatus comprising a housing provided with a formaldehyde gas generator which generates formaldehyde gas, a humidity regulator which regulates the humidity in a disinfection space, a temperature regulator which regulates the temperature of said disinfection space, a gas deliverer which delivers and introduces said formaldehyde gas into said disinfection space, a discharge gas treater which treats discharge gas from said disinfection space and a gas ejector which ejects said discharge gas, and provided with a controller which controls generation of said formaldehyde gas in said formaldehyde gas generator at a concentration within a specified range, controls the humidity in said disinfection

ATTACHMENT F

space within a specified range by said humidity regulator, controls the temperature of said disinfection space within a specified range by said temperature regulator, controls the gas delivery rate by said gas deliverer within a specified range, controls the amount of formaldehyde in the discharge gas by said discharge gas treater within a specified range and controls the amount of discharge gas ejected by said gas ejector, and which controls the formaldehyde gas concentration, humidity and temperature in said disinfection space to 160 ppm or greater, 50-90% RH and 20-40°C, respectively, based on the values of the formaldehyde gas concentration, humidity and temperature in said disinfection space from formaldehyde gas concentration, humidity and temperature monitors in said disinfection space.

2. (Amended) A formaldehyde gas disinfection apparatus comprising a formaldehyde gas generator which generates formaldehyde gas, a humidity regulator which regulates the humidity in a disinfection space, a temperature regulator which regulates the temperature of said disinfection space, a gas deliverer which delivers and introduces said formaldehyde gas into a disinfection space, a discharge gas treater which treats discharge gas from said disinfection space and a gas ejector which ejects said discharge gas, and a controller which controls generation of said formaldehyde gas in said formaldehyde gas generator at a concentration within a specified range, controls the humidity in said disinfection space within a specified range by said humidity regulator, controls the temperature of said disinfection space within a specified range by said temperature regulator, controls the gas delivery rate by said gas deliverer within a specified range, controls the amount of formaldehyde in the discharge gas by said discharge gas treater within a specified range and controls the amount of discharge gas ejected by said gas ejector.

3. (Amended) A formaldehyde gas disinfection apparatus characterized by being provided with a formaldehyde gas supply/ejection apparatus which supplies and ejects formaldehyde gas into and from a sealed chamber and a chamber pressure regulator which regulates the pressure in said chamber, wherein said formaldehyde gas supply/ejection apparatus

comprises a formaldehyde gas generator which generates said formaldehyde gas, a humidity regulator which regulates the humidity in a disinfection space, a temperature regulator which regulates the temperature of said disinfection space, a gas deliverer which delivers and introduces said formaldehyde gas into a chamber, a discharge gas treater which treats discharge gas from said chamber, a gas ejector which ejects said discharge gas, and a controller which controls the formaldehyde gas concentration, humidity and temperature in said chamber to a prescribed concentration, humidity and temperature, and said chamber pressure regulator comprises an air supply unit which supplies outside air into said chamber, a gas discharge unit which discharges air in said chamber to the outside, pressure difference detector means which detects the pressure difference between the inside and outside of said chamber, control means which controls said air supply unit and said gas discharge unit based on a detected value detected by said pressure difference detector means, and controlled state output means which outputs the controlled state of said chamber pressure based on said detected value detected by said pressure difference detector means.


REMARKS

Kindly enter the above editorial corrections prior to initial examination.

Attached hereto is a marked-up version of the changes made to the claim by the current amendment. The attachment page is captioned "**Version with markings to show changes made.**"

Respectfully submitted,

Tomohiko HASHIBA

By 
Charles R. Watts
Registration No. 33,142
Attorney for Applicant

CRW/asd
Washington, D.C. 20006-1021
Telephone (202) 721-8200
Facsimile (202) 721-8250
April 1, 2002

Claim AmendmentVersion with Markings to
Show Changes Made

Please amend claims 1, 2 and 3 as follows.

1. A formaldehyde gas disinfection apparatus comprising a housing provided with a formaldehyde gas generator which generates formaldehyde gas, a humidity regulator which regulates the humidity of said formaldehyde gas, a temperature regulator which regulates the temperature of said formaldehyde gas, a gas deliverer which delivers and introduces said formaldehyde gas into ^{in a disinfection space} ~~the said~~ a disinfection space, a discharge gas treater which treats discharge gas from said disinfection space and a gas ejector which ejects said discharge gas, and provided with a controller which controls generation of said formaldehyde gas in said formaldehyde gas generator at a concentration within a specified range, controls the humidity of ^{in disinfection space} ~~said formaldehyde gas~~ within a specified range by said humidity regulator, controls the temperature of said ^{disinfection space} ~~formaldehyde gas~~ within a specified range by said temperature regulator, controls the gas delivery rate by said gas deliverer within a specified range, controls the amount of formaldehyde in the discharge gas by said discharge gas treater within a specified range and controls the amount of discharge gas ejected by said gas ejector, and which controls the formaldehyde gas concentration, humidity and temperature in said disinfection space to 160 ppm or greater, 50-90% RH and 20-40°C, respectively, based on the values of the formaldehyde gas concentration, humidity and temperature in said disinfection

- 29 -

space from formaldehyde gas concentration, humidity and temperature monitors in said disinfection space.

2. A formaldehyde gas disinfection apparatus comprising a formaldehyde gas generator which generates formaldehyde gas, a humidity regulator which regulates the humidity ^{in a disinfection space} ~~of said formaldehyde gas~~, a temperature regulator ^{disinfection space} ~~which regulates the temperature of said formaldehyde gas~~, a gas deliverer which delivers and introduces said formaldehyde gas into a disinfection space, a discharge gas treater which treats discharge gas from said disinfection space and a gas ejector which ejects said discharge gas, and a controller which controls generation of said formaldehyde gas in said formaldehyde gas generator at a concentration within a specified range, controls the humidity ⁱⁿ ~~of~~ said ^{disinfection space} ~~formaldehyde gas~~ within a specified range by said humidity regulator, controls the temperature of said ^{disinfection space} ~~formaldehyde gas~~ within a specified range by said temperature regulator, controls the gas delivery rate by said gas deliverer within a specified range, controls the amount of formaldehyde in the discharge gas by said discharge gas treater within a specified range and controls the amount of discharge gas ejected by said gas ejector.

3. A formaldehyde gas disinfection apparatus characterized by being provided with a formaldehyde gas supply/ejection apparatus which supplies and ejects formaldehyde gas into and from a sealed chamber and a chamber pressure regulator which regulates the pressure in

- 30 -

said chamber, wherein said formaldehyde gas supply/ejection apparatus comprises a formaldehyde gas generator which generates said formaldehyde gas, a humidity regulator which regulates the humidity ^{in a disinfection space} ~~of said formaldehyde gas~~, a

5 temperature regulator which regulates the temperature of said ^{disinfection space} ~~formaldehyde gas~~, a gas deliverer which delivers and introduces said formaldehyde gas into a chamber, a discharge gas treater which treats discharge gas from said chamber, a gas ejector which ejects said discharge gas, and a

10 controller which controls the formaldehyde gas concentration, humidity and temperature in said chamber to a prescribed concentration, humidity and temperature, and said chamber pressure regulator comprises an air supply unit which supplies outside air into said chamber, a gas

15 discharge unit which discharges air in said chamber to the outside, pressure difference detector means which detects the pressure difference between the inside and outside of said chamber, control means which controls said air supply unit and said gas discharge unit based on a detected value
20 detected by said pressure difference detector means, and controlled state output means which outputs the controlled state of said chamber pressure based on said detected value detected by said pressure difference detector means.

4. A formaldehyde gas disinfection apparatus
25 according to claim 3, characterized in that said controller controls the formaldehyde gas concentration in said chamber to 160 ppm or greater based on the outputted value from a

10089604 040302
THE COMMISSIONER IS AUTHORIZED
TO CHARGE ANY DEFICIENCY IN THE
FEES FOR THIS PAPER TO DEPOSIT
ACCOUNT NO. 2310075
10/089604
JC10 Rec'd PCT/PTO 01 APR 2002

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of :
Tomohiko HASHIBA : Attn: BOX PCT
Serial No. NEW : Docket No. 2002_0395A
Filed April 1, 2002 :
FORMALDEHYDE GAS STERILIZER
[Corresponding to PCT/JP00/06990
Filed October 6, 2000]

PRELIMINARY AMENDMENT TO REDUCE PTO FILING FEE

Assistant Commissioner for Patents,
Washington, DC 20231

Sir:

Please amend the above-identified application as follows.

In the Claims:

Kindly amend claim 5 as follows.

5. (Amended) A formaldehyde gas disinfection apparatus according to claim 3, characterized in that said gas discharge unit is provided with a treatment apparatus which treats gas discharged from said chamber.

Kindly add new claim 6 as follows.

6. (New) A formaldehyde gas disinfection apparatus according to claim 4, characterized in that said gas discharge unit is provided with a treatment apparatus which treats gas discharged from said chamber.

ATTACHMENT E


REMARKS

The above claim amendments are presented in order to remove multiple claim dependency, o as to reduce the required filing fee.

Attached hereto is a marked-up version of the changes made to the claim by the current amendment. The attachment page is captioned "**Version with markings to show changes made.**"

Respectfully submitted,

Tomohiko HASHIBA

By 
Charles R. Watts
Registration No. 33,142
Attorney for Applicant

CRW/asd
Washington, D.C. 20006-1021
Telephone (202) 721-8200
Facsimile (202) 721-8250
April 1, 2002

Version with Markings to
Show Changes Made

formaldehyde gas concentration monitor provided in said chamber, controls the humidity in said chamber to 50-90% relative humidity based on the outputted value from a humidity monitor provided in said chamber, and controls the temperature in said chamber to 20-40°C based on the outputted value from a temperature monitor provided in said chamber.

5. A formaldehyde gas disinfection apparatus according to claim 3 ~~or 4~~, characterized in that said gas discharge unit is provided with a treatment apparatus which treats gas discharged from said chamber.

10,089604

3/1/12
JC10 Rec'd PCT/PTO 01 APR 2002

DESCRIPTION

FORMALDEHYDE GAS STERILIZERTECHNICAL FIELD

5 The present invention relates to a formaldehyde gas disinfection apparatus whereby a disinfection space is disinfected using formaldehyde gas.

BACKGROUND ART

10 Methods of using formaldehyde gas for the purpose of disinfection treatment of spaces in bioclean rooms, operating rooms and the like have been conventionally known whereby a disinfection space is sealed and a formaldehyde gas generator is set therein and used to generate
15 formaldehyde gas.

 However, since the disinfecting (throughout the present specification, this term will include the meaning of "sterilizing") effect of formaldehyde gas depends largely on the formaldehyde gas concentration, humidity and temperature
20 in the disinfection space, simply filling the disinfection space with formaldehyde gas for the specified time has not been sufficient to adequately guarantee a disinfecting effect.

 In addition, formaldehyde gas must produce a
25 guaranteed disinfecting (and sterilizing) effect not only in spaces to be disinfected which are established in rooms, but also in mobile spaces, temporarily formed spaces and spaces

- 2 -

with shapes that do not permit the use of ordinary formaldehyde gas generators. Specifically, such spaces exist in ambulances, temporary tent operating rooms and artificial respirators. It has been difficult to achieve a sufficient disinfecting effect in such spaces by conventional methods. Moreover, such disinfection spaces also require interior pressure control since they are sealed spaces (rooms).

DISCLOSURE OF THE INVENTION

One mode of the formaldehyde gas disinfection apparatus of the invention comprises a housing provided with a formaldehyde gas generator which generates formaldehyde gas, a humidity regulator which regulates the humidity of the formaldehyde gas, a temperature regulator which regulates the temperature of the formaldehyde gas, a gas deliverer which delivers and introduces the formaldehyde gas into a disinfection space, a discharge gas treater which treats discharge gas from the disinfection space and a gas ejector which ejects the discharge gas, and provided with a controller which controls generation of the formaldehyde gas in the formaldehyde gas generator at a concentration within a specified range, controls the humidity of the formaldehyde gas within a specified range by the humidity regulator, controls the temperature of the formaldehyde gas within a specified range by the temperature regulator, controls the gas delivery rate by the gas deliverer within a specified

range, controls the amount of formaldehyde in the discharge gas by the discharge gas treater within a specified range and controls the amount of discharge gas ejected by the gas ejector, and which controls the formaldehyde gas

5 concentration, humidity and temperature in the disinfection space to 160 ppm or greater, 50-90% RH and 20-40°C, respectively, based on the values of the formaldehyde gas concentration, humidity and temperature in the disinfection space from formaldehyde gas concentration, humidity and
10 temperature monitors in the disinfection space.

Incidentally, the formaldehyde gas concentration is the concentration of formaldehyde itself as measured according to JIS K0303 in combination with liquid chromatography analysis.

15 The formaldehyde gas disinfection apparatus according to this mode of the invention allows delivery to be accomplished in an easy manner while discharge gas is cleaned. Also, since the controller allows the formaldehyde gas concentration, humidity and temperature in the
20 disinfection space to be controlled to 160 ppm or greater, 50-90% RH and 20-40°C, respectively, it is possible to achieve a sufficiently guaranteed disinfecting effect.

Another mode of the formaldehyde gas disinfection apparatus of the invention comprises a formaldehyde gas
25 generator which generates formaldehyde gas, a humidity regulator which regulates the humidity of the formaldehyde gas, a temperature regulator which regulates the temperature

of the formaldehyde gas, a gas deliverer which delivers and introduces the formaldehyde gas into a disinfection space, a discharge gas treater which treats discharge gas from the disinfection space and a gas ejector which ejects the discharge gas, and a controller which controls generation of the formaldehyde gas in the formaldehyde gas generator at a concentration within a specified range, controls the humidity of the formaldehyde gas within a specified range by the humidity regulator, controls the temperature of the formaldehyde gas within a specified range by the temperature regulator, controls the gas delivery rate by the gas deliverer within a specified range, controls the amount of formaldehyde in the discharge gas by the discharge gas treater within a specified range and controls the amount of discharge gas ejected by the gas ejector.

The formaldehyde gas disinfection apparatus according to this mode of the invention allows the formaldehyde gas concentration, humidity and temperature in the disinfection space to be controlled to a prescribed concentration, humidity and temperature, respectively, by the controller in order to produce a sufficiently guaranteed disinfecting effect.

Yet another mode of the formaldehyde gas disinfection apparatus of the invention is characterized by being provided with a formaldehyde gas supply/ejection apparatus which supplies and ejects formaldehyde gas into and from a sealed chamber and a chamber pressure regulator

which regulates the pressure in the chamber, wherein the formaldehyde gas supply/ejection apparatus comprises a formaldehyde gas generator which generates the formaldehyde gas, a humidity regulator which regulates the humidity of the formaldehyde gas, a temperature regulator which regulates the temperature of the formaldehyde gas, a gas deliverer which delivers and introduces the formaldehyde gas into a chamber, a discharge gas treater which treats discharge gas from the chamber, a gas ejector which ejects the discharge gas, and a controller which controls the formaldehyde gas concentration, humidity and temperature in the chamber to a prescribed concentration, humidity and temperature, and the chamber pressure regulator comprises an air supply unit which supplies outside air into the chamber, a gas discharge unit which discharges gas in the chamber to the outside, pressure difference detector means which detects the pressure difference between the inside and outside of the chamber, control means which controls the air supply unit and the gas discharge unit based on a detected value detected by the pressure difference detector means, and controlled state output means which outputs the controlled state of the chamber pressure based on the detected value detected by the pressure difference detector means.

Yet another mode of the formaldehyde gas disinfection apparatus of the invention is characterized in that the controller controls the formaldehyde gas

concentration in the chamber to 160 ppm or greater based on the outputted value from a formaldehyde gas concentration monitor provided in the chamber, controls the humidity in the chamber to 50-90% (relative humidity) based on the
5 outputted value from a humidity monitor provided in the chamber, and controls the temperature in the chamber to 20-40°C based on the outputted value from a temperature monitor provided in the chamber. Here, the formaldehyde gas concentration is the concentration of formaldehyde itself as
10 measured according to JIS K0303 in combination with liquid chromatography analysis.

This mode of the formaldehyde gas disinfection apparatus of the invention is provided with a chamber pressure regulator, thus allowing the chamber pressure to be
15 kept constant even in cases where temperature increase in the chamber causes expansion of the gas in the chamber.

Yet another mode of the formaldehyde gas disinfection apparatus of the invention is characterized in that the gas discharge unit is provided with a treatment
20 apparatus which treats gas discharged from the chamber.

According to this mode of the formaldehyde gas disinfection of the invention, the formaldehyde and other gas in the chamber is treated by a treatment apparatus even in cases where the gas in the chamber has been discharged to
25 regulate the chamber pressure, so that the formaldehyde gas may be treated before it is ejected outside.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic drawing of a formaldehyde gas disinfection apparatus according to the first embodiment.

5 Fig. 2 is a schematic drawing of a formaldehyde gas disinfection apparatus according to the second embodiment.

10 Fig. 3 is a flow chart illustrating chamber pressure regulation in a formaldehyde gas disinfection apparatus according to the second embodiment.

BEST MODE FOR CARRYING OUT THE INVENTION

15 A first embodiment of the invention will now be explained with reference to Fig. 1. Fig. 1 is a schematic drawing of a formaldehyde gas disinfection apparatus 2 according to the first embodiment. The formaldehyde gas disinfection apparatus 2 has a housing 10 which can be mounted on the outside of a biohazard safety cabinet to allow easy disinfection of the space in the cabinet (hereunder referred to as the "disinfection space 100").
20 Here, the interior of the cabinet is formed into a closed space by closing a damper or the like. The cabinet is provided with a formaldehyde gas inlet 102 for supply of formaldehyde gas from the formaldehyde gas disinfection
25 apparatus 2, and a discharge gas outlet 104 for ejection of the formaldehyde gas.

In the disinfection space 100 there are provided a formaldehyde gas concentration sensor 12, a humidity sensor 14 and a temperature sensor 16, and the monitored value from each is transmitted to the controller 24 via control lines 18, 20, 22.

Outside air is introduced into the disinfection space 100 through the formaldehyde gas inlet 102 by a pump 26, and then discharged to the outside from the discharge gas outlet 104 through a pump 28. Also, the discharge gas leaving the pump 28 is reintroduced to the pump 26 through a recirculation conduit 30 for circulation of the air in the disinfection space 100.

The temperature and humidity in the disinfection space 100 obtained by the humidity sensor 14 and temperature sensor 16 are regulated by a humidity regulator 32 and temperature regulator 34 of the controller 24 to a specified temperature range of 20-40°C and humidity range of 50-90% (relative humidity). In addition, a prescribed formaldehyde gas concentration of 160 ppm or greater is maintained by regulation with the formaldehyde gas generator 36 and pump 26, and the condition with a formaldehyde gas concentration of 160 ppm or greater is maintained for a prescribed period (5 hours). The formaldehyde gas concentration, humidity and temperature in the disinfection space 100 are each monitored by a concentration sensor 12, humidity sensor 14 and temperature sensor 16, and the necessary calculations are performed by the controller 24 based on these values and the

formaldehyde gas generator 36, temperature regulator 34, humidity regulator 32 and pump 26 are controlled through the control lines 38, 40, 42 and 44. The formaldehyde gas concentration is the concentration of formaldehyde itself as measured according to JIS K0303 in combination with liquid chromatography analysis.

After the prescribed time has elapsed, the formaldehyde gas generator 36 is switched off and treatment by the discharge gas treater 46 is carried out until the formaldehyde concentration in the disinfection space 100 falls below a prescribed value. That is, the gas leaving the pump 28 is reintroduced to the pump 26 via the circulation conduit 30 for circulation of the air in the disinfection space 100, thereby gradually reducing the formaldehyde concentration to below the prescribed concentration.

In the mode described above, a state with a formaldehyde gas concentration of 160 ppm or greater is maintained for 5 hours for disinfection of the disinfection space 100, as this condition is the most practical condition. However, the disinfection space 100 may also be disinfected by maintaining a state with a formaldehyde gas concentration of 300 ppm or greater for 2 hours, or by maintaining a state with a formaldehyde gas concentration of 60 ppm or greater for 12 hours.

According to the invention there are no particular restrictions on the formaldehyde gas generator used, but it

- 10 -

must be able to generate formaldehyde gas at high concentration with humidity and temperature control.

Since the disinfecting effect of formaldehyde gas is known to be correlated with rise in humidity, the formaldehyde is preferably generated while maintaining optimum humidity. Specifically there may be mentioned means of generating formaldehyde from methanol, including (1) generating means using a catalyst, (2) generating means by ultrasonic treatment and (3) generating means by ultraviolet irradiation. According to the invention, (1) is particularly preferred. Here, a very trace amount of water will be produced as a by-product.

As specific catalysts to be used for the aforementioned generating means using a catalyst, there may be mentioned platinum, copper, aluminum, carbon and mixtures thereof. The catalyst is packed into a cylindrical vessel and the temperature of the cylindrical vessel is regulated for heating and cooling of the catalyst to the prescribed temperature. A prescribed amount of methanol is first gasified and fed to the catalyst section to initiate the catalytic reaction.

Control of the amount of formaldehyde generation depends on control of the catalyst temperature and on the amount of methanol supplied and gasified. Optimization of the reaction conditions is possible by actually generating formaldehyde and appropriately measuring the formaldehyde concentration. Specifically, a calibration curve may be

- 11 -

drawn from measurement data for the catalytic reaction temperature and amount of formaldehyde gas generation, with respect to a given methanol supply amount. For example, when 1000 g of methanol is used with copper as the catalyst, 5 750 g of formaldehyde gas can be produced within about 30 minutes. A gasification method by ultrasonic treatment instead of heating and cooling alone may also be employed for gasification of the methanol.

The formaldehyde generating means is means for 10 ultrasonic treatment or ultraviolet irradiation treatment of methanol. This is made possible by placing the methanol in an appropriate reactor and providing an ultrasonic treatment apparatus or ultraviolet irradiation treatment apparatus around or inside the reactor. According to the invention, 15 the method of generating the formaldehyde gas is preferably a method of heating paraformaldehyde. There are no particular restrictions on the heating means therefor. Also, the amount of gas generated may be easily controlled by controlling the heating time and heating temperature. 20 Paraformaldehyde is ordinarily available as a commercial product. The generated formaldehyde gas may be used directly or after external dilution with a carrier gas (air or inert gas).

The concentration of the formaldehyde gas which is 25 generated by the method of the invention may be easily kept at 160 ppm or greater by using the generator described above. It may also be generated at an even higher

concentration to give the disinfecting effect (or sterilizing effect) explained hereunder.

According to the invention, an appropriate formaldehyde gas concentration is preferably held in an appropriate temperature range for a long period in order to regulate the temperature in the disinfection space. There are no particular restrictions on the temperature regulating means provided for this purpose, and any ordinary publicly known heating or cooling apparatus may be employed. Using an apparatus with sufficient heat-exchange volume will allow regulation to a degree permitting variations in temperature to be substantially ignored, although this will depend on the volume and shape of the space. The preferred temperature range for the method of the invention is 20-40°C, and more preferably 25-35°C, as ordinary temperature. However, disinfection can also be accomplished in the disinfection space at temperatures other than these temperature ranges.

According to the invention, an appropriate formaldehyde gas concentration is preferably held in an appropriate humidity range for a long period in order to regulate the humidity in the closed space. There are no particular restrictions on the humidity regulating means provided for this purpose, and any ordinary publicly known humidifying or dehumidifying apparatus may be employed. Using an apparatus with sufficient humidifying or dehumidifying volume will allow regulation to a degree

- 13 -

permitting variations in humidity to be substantially ignored, although this will depend on the volume and shape of the space.

5 The disinfecting effect of formaldehyde gas is known to be dependent on humidity, but when the relative humidity increases above a certain point, condensation occurs due to moisture condensation, and aggregation thereof in the disinfection space causes adhesion of formaldehyde and its oxides such as formic acid and the like on the walls
10 and elsewhere. This results in contamination of the disinfection space.

According to the invention, therefore, the humidity must be maintained at a level in which the disinfecting effect of the formaldehyde is adequately
15 exhibited while the aforementioned condensation phenomenon does not occur. This humidity range will depend on the temperature, but the range is a relative humidity of 50-90% (and preferably 80-90%) in the temperature range of 20-40°C. A humidity below this range results in an insufficient
20 disinfecting effect, and a humidity above this range (above 90%) can result in contamination due to condensation.

There are no particular restrictions on the method of monitoring the temperature in the closed space, and an ordinary thermometer may be used. The monitored temperature
25 may be inputted into the controller either manually or automatically. The temperature in the disinfection space is thus stored for a specific time in the controller.

The precision of the monitored temperature is also not particularly restricted, and it may be a measuring precision of about $\pm 1^{\circ}\text{C}$. A plurality of monitoring means may also be employed. This will allow monitoring of variations in the temperature in the chamber, for more precise temperature regulation.

There are no particular restrictions on the method of monitoring the humidity in the closed space, and an ordinary hygrometer may be used. The monitored humidity may be inputted into the controller either manually or automatically. The humidity in the disinfection space is thus stored for a specific time in the controller.

The precision of the monitored humidity is also not particularly restricted, and it may be a measuring precision of about $\pm 1\%$ in a temperature range of $20-40^{\circ}\text{C}$. A plurality of monitoring means may also be employed. This will allow monitoring of variations in the humidity in the chamber, for more precise humidity regulation.

There are no particular restrictions on the method of monitoring the formaldehyde concentration in the closed space, and ordinary analysis means may be used. Specifically there may be mentioned a method employing a formaldehyde sensor, or a method by gas chromatography or ion chromatography based on air sampling. The monitored concentration may be inputted into the controller either manually or automatically. The concentration in the

disinfection space is thus stored for a specific time in the controller.

The precision of the monitored concentration is also not particularly restricted, and it may be a measuring precision of about ± 10 ppm in the aforementioned concentration range. A plurality of monitoring means may also be employed. This will allow monitoring of variations in the concentration in the chamber, for more precise regulation of the concentration.

According to the invention, the temperature, humidity and formaldehyde concentration in the disinfection space must be kept within the prescribed ranges for a prescribed time. The formaldehyde gas concentration in the disinfection space is reduced by various reactions such as the disinfection reaction occurring in the disinfection space. In order to maintain a constant formaldehyde gas concentration, therefore, it is necessary to incorporate the temperature, humidity and formaldehyde concentration data for a set time period and control the formaldehyde generating means for the specific range. There are no particular restrictions on the controlling method or controller used for this purpose, and any manual method or computer program-employing controller may be used. Since a high formaldehyde concentration must be maintained for a long period according to the invention, the controller preferably has a function by which control is achieved by sending signals to the formaldehyde generating apparatus,

pump, temperature regulator and humidity regulator while optimizing these signals on an on-time basis.

There are no particular restrictions on the construction of the controller, but it preferably comprises

5 (1) means (such as a keyboard) for inputting the set temperature, set humidity, set formaldehyde concentration, etc., (2) means (such as a memory) for storing the measured data from the temperature, humidity and formaldehyde concentration monitors, (3) means (such as a display or

10 printer) for outputting those values, (4) means for discerning the difference between measured data and the set values and (5) means for outputting control signals to the temperature regulating system, humidity regulating system and formaldehyde gas generating system. For example, when

15 the formaldehyde concentration is determined to be below the set value by the means of (4) above, the means of (5) above sends a control signal to the formaldehyde generating apparatus for supply of the methanol starting material or increase in the catalytic reaction temperature to increase

20 the amount of formaldehyde gas generated.

There are no particular restrictions on the method of measuring the disinfecting effect by the apparatus of the invention, or on the microbes for which it is employed, and any of various publicly known methods may be applied.

25 Specifically there may be mentioned methods conforming to the ISO standard. Commercially available biological indicators in various forms may be used for the invention

with high convenience and reproducibility. Specifically there may be used a test strip type (test paper type) or a Proof system, while microbes preferred for application of the invention include *Bacillus subtilis*, var. *niger* (ATCC No.9372) and *Bacillus stearothermophilus* (ATCC No.7953).

The disinfecting effect will usually be judged by (1) placing test strips or the like in a plurality of selected locations in the disinfection space, (2) using the method of the invention for formaldehyde gas disinfection treatment and then (3) culturing the test strips in suitable medium and determining, based on the presence or absence of viable microbes, either negativity (no viable microbes) or positivity (viable microbes). Such a judgment method can thus indicate a disinfecting effect, and even indicate a sterilizing effect.

The culturing conditions used may be, specifically, culturing for 7 days in tryptone-soya bouillon medium ($30-35^{\circ}\text{C} \pm 1.0^{\circ}\text{C}$) in the case of bacteria of *Bacillus subtilis*, var. *niger* (ATCC No.9372), and culturing for 7 days or longer in tryptone-soya bouillon medium ($55-60^{\circ}\text{C} \pm 1.0^{\circ}\text{C}$) in the case of bacteria of *Bacillus stearothermophilus* (ATCC No.7953).

Specifically, the disinfecting effect obtained by the method of the invention, as determined by the judgment method described above, exhibits negativity (i.e., sterility) when using on the order of 10^6 cells of *Bacillus subtilis*, var. *niger* (ATCC No.9372) and when using on the

order of 10^6 cells of *Bacillus stearothermophilus* (ATCC No.7953).

There are also no particular restrictions on the treatment or treater for the formaldehyde gas-containing discharge gas which may be used for the invention. There may be mentioned ordinary publicly known treatment methods, such as washing with a scrubber, absorption with an absorbing agent, removal by decomposition reaction using an appropriate catalyst, or combinations of these methods. The degree of treatment and volume of treatment may be easily selected as appropriate in consideration of the concentration of the formaldehyde gas to be treated, the included impurities, the disinfection space volume and emission standards.

The housing of the formaldehyde gas disinfection apparatus of the invention is not particularly restricted, and it facilitates handling as a single unit for installation, removal and transport of the apparatus. It may also be provided with moving means.

There are no particular restrictions on application of the formaldehyde gas disinfection apparatus of the invention, and it may be used for easy and safe disinfection of disinfection spaces such as chamber interiors, chamber exteriors, stationary rooms, mobile rooms and the like. For example, in cases where the disinfection space is a fixed space in a chamber (such as for bioclean rooms, sample preparation clean rooms and operating rooms),

the chamber may be sealed and provided with a formaldehyde gas inlet from the chamber and discharge gas outlet to the outside. When the disinfection space is a temporarily defined space outdoors (for example, in an ambulance, mobile
5 clean room, mobile operating room or tent operating room), the formaldehyde gas disinfection apparatus of the invention may be sealed in the same manner and provided with a formaldehyde gas inlet from the chamber and discharge gas outlet to the outside. When the disinfection space is very
10 narrow and long (for example, an artificial respirator), the formaldehyde gas disinfection apparatus of the invention may be provided with a formaldehyde gas inlet at one end for introduction of the formaldehyde gas, thus allowing disinfection of the interior space.

15 A formaldehyde gas disinfection apparatus according to a second mode of the invention will now be explained with reference to Figs. 2 and 3. The formaldehyde gas disinfection apparatus according to this second mode is provided with a formaldehyde gas supply/ejection apparatus 4
20 having the same construction as the formaldehyde gas disinfection apparatus 2 according to the first mode, and a chamber pressure regulator 6 which regulates the pressure in the disinfection space formed as a sealed space.

25 Fig. 2 is a schematic diagram of a formaldehyde gas disinfection apparatus according to the second mode, having a construction provided with formaldehyde gas supply/ejection apparatus 4 and a chamber pressure regulator

- 20 -

6. The chamber pressure regulator 6 is provided in contact with the chamber wall 50, and it regulates the pressure in the chamber sealed by the chamber wall 50. The chamber pressure regulator 6 has a construction provided with an air supply unit 52 which supplies air from the outside into the chamber, a gas discharge unit 54 which discharges gas in the chamber to the outside, a fine pressure difference detector 56 which detects pressure changes between the inside and outside of the chamber, and a control unit 58 which controls the air supply unit 52 and gas discharge unit 54 based on the values detected by the fine pressure difference detector 56.

The air supply unit 52 has a supply air grill 60 for incorporation of outside air, and is provided with three supply air regulating electromagnetic valves 62 downstream from the supply air grill 60 for regulation of the air volume supplied from the outside into the chamber. An air fan 66 and HEPA (high efficiency particulate air) filter 68 are provided in that order in an air duct 64 downstream from the supply air regulating electromagnetic valves 62.

The gas discharge unit 54 has a HEPA filter 72 in an air duct 70, and is provided with three discharge gas volume regulating electromagnetic valves 74 downstream from the HEPA filter 72 for regulation of the air volume discharged from the inside to the outside of the chamber. An air treater 76 having a construction provided with a platinum catalyst and a heater is also provided downstream

from the discharge gas volume regulating electromagnetic valves 74. Here, outside air is supplied to the air treater 76 through an electromagnetic valve 78. The temperature of the catalyst may be kept constant by supply of this outside
5 air.

Downstream from the discharge gas volume regulating electromagnetic valves 74 there is provided an air fan 82 which discharges air passing through the air treater 76 and air taken in from the supply air grill 80 out
10 from the chamber pressure regulator 6.

The fine pressure difference detector 56 is provided on the chamber wall 50 and connected to the control unit 58 via a signal wire, and the pressure difference between the outside and inside of the chamber detected by
15 the fine pressure difference detector 56 is inputted to the control unit 58.

The control unit 58 is connected to supply air volume regulating electromagnetic valves 62 and the air fan 66 of the air supply unit 52 through a signal wire, and is
20 also connected to the discharge gas volume regulating electromagnetic valves 74, electromagnetic valve 78 and air fan 82 of the gas discharge unit 54. The control unit 58 controls the supply air volume regulating electromagnetic valves 62, air fan 66, discharge volume regulating
25 electromagnetic valves 74 and air fan 82, based on the detected value of the fine pressure difference detector 56. There are also connected to the control unit 58 a storage

device 84 which constantly stores the detected value from the fine pressure difference detector 56 and an output device 86 such as a printer which outputs the detected value stored in the storage device 84.

5 In this formaldehyde gas disinfection apparatus, outside air is introduced into the chamber through a formaldehyde gas inlet 102 by the pump 26 of the formaldehyde gas supply/ejection apparatus 4, and is discharged to the outside air by a pump 28 through a
10 discharge gas outlet 104. The temperature and humidity in the chamber obtained by the humidity sensor 14 and temperature sensor 16 are controlled by the controller 24 to ranges of a temperature of 20-40°C and a humidity of 50-90% (relative humidity), respectively, and are regulated by the
15 humidity regulator 32 and temperature regulator 34. Also, the prescribed formaldehyde gas concentration of 160 ppm or greater is regulated by the formaldehyde gas generator 36 and pump 26 and maintained for the prescribed time period. The formaldehyde gas concentration, humidity and temperature
20 are each monitored by the concentration sensor 12, humidity sensor 14 and temperature sensor 16, the necessary calculations are performed by the controller 24 based on the obtained values, and the formaldehyde gas generator 36, temperature regulator 34, humidity regulator 32 and pump 26
25 are controlled via the control lines 38, 40, 42, 44. The formaldehyde gas concentration is the concentration of

formaldehyde itself as measured according to JIS K0303 in combination with liquid chromatography analysis.

The pressure in the chamber is kept at positive pressure by the chamber pressure regulator while the
5 temperature, humidity and formaldehyde gas concentration in the chamber are kept in a range of 20-40°C, a range of 50-90% (relative humidity) and 160 ppm or greater, respectively, for a prescribed time. Specifically, the chamber interior is kept at positive pressure (10-20 Pa) by
10 the treatment illustrated in the flow chart of Fig. 3. The control based on this flow chart is repeatedly accomplished by the control unit 58 at micro time intervals. Positive pressure means a positive value for (chamber interior pressure) - (exterior chamber pressure).

15 First, the control unit 58 obtains the pressure difference between the inside and outside of the chamber as detected by the fine pressure difference detector 56 (step S10), and stores it in the memory device 84 (step S11). A pressure difference of 10-20 Pa (step S12) is ordinary
20 pressure, and therefore the flow returns to the processing of step S10, and for continued processing of pressure difference detection (step S10) and detected value storage (Step S11).

25 However, a pressure difference of less than 10 Pa (step S12) between the inside and outside of the chamber as detected by the fine pressure difference detector 56 indicates that the chamber pressure is too low, and

- 24 -

therefore air is supplied into the chamber (step S14). That is, a control signal is sent to the supply air volume regulating electromagnetic valves 62 and air fan 66 to open the supply air volume regulating electromagnetic valves 62 for a prescribed time and to activate the air fan 66. This supplies air from outside the chamber into the chamber through the supply air volume regulating electromagnetic valves 62 and HEPA filter 64, and causes the pressure in the chamber to increase by a value corresponding to the time the supply air volume regulating electromagnetic valves 62 are opened. If the pressure difference between the inside and outside of the chamber as detected by the fine pressure difference detector 56 is still less than 10 Pa upon completion of air supply into the chamber, the air supply procedure is carried out again (steps S10-S12, step S14).

A pressure difference between the inside and outside of the chamber as detected by the fine pressure difference detector 56 of greater than 20 Pa (step S12) indicates that the pressure in the chamber is too high, and therefore air is discharged to the outside (step S13). That is, a control signal is sent to the discharge gas volume regulating electromagnetic valves 74 and air fan 82 to open the discharge gas volume regulating electromagnetic valves 74 for a prescribed time and to activate the air fan 82. This discharges gas in the chamber to the outside through the HEPA filter 72, discharge gas volume regulating electromagnetic valves 74 and air treater 76, and causes the

- 25 -

pressure in the chamber to decrease by a value corresponding to the time the discharge gas volume regulating electromagnetic valves 74 are opened.

5 If the pressure difference between the inside and outside of the chamber as detected by the fine pressure difference detector 56 is still 20 Pa or greater upon completion of discharge gas discharge to the outside, the discharge gas discharge procedure is carried out again (steps S10-S13).

10 Since this chamber pressure controller 6 allows the pressure difference between the inside and outside of the chamber to be kept at a constant 10-20 Pa, when formaldehyde gas is used for disinfection of the chamber it is possible to prevent leakage of untreated formaldehyde gas
15 to the outside even when the volume of the gas in the chamber increases due to increasing chamber temperature, since the formaldehyde gas is discharged after being treated by the air treater 76. Also, since the detected pressure difference between the inside and outside of the chamber is
20 stored in the memory device 84 in a time-serial manner, the detected value stored in the memory device 84 may be outputted by the output device 86 to ensure that the pressure in the chamber is constantly kept at the prescribed positive pressure, based on the output results. It is thus
25 possible to ensure that untreated formaldehyde gas is not leaking out of the chamber.

After the temperature, humidity and formaldehyde gas concentration in the chamber have been kept in the temperature range of 20-40°C, humidity range of 50-90% (relative humidity) and formaldehyde gas concentration range of 160 ppm or greater for the prescribed time, the formaldehyde gas generator 36 is switched off and treatment is carried out with the discharge gas treater 46 until the formaldehyde concentration in the chamber falls to below a prescribed value.

In the second mode described above, the chamber pressure regulator 6 is provided with an air treater 76, but treatment of the formaldehyde gas may also be accomplished using the discharge gas treater 46 of the formaldehyde gas supply/ejection apparatus 4.

The apparatus of the invention has an integral housing structure and is mounted outside the disinfection space, while formaldehyde gas is introduced into the disinfection space and discharge gas from the disinfection space is treated to produce clean discharge gas. The apparatus is also demountable. The apparatus of the invention can also be easily moved to the location of the disinfection space, thus allowing adequate disinfection which can easily ensure the sterility of ambulance rooms, mobile operating rooms (including tents) and bioclean rooms.

The apparatus of the invention also leaves no residue of formaldehyde gas in the disinfection space after disinfection treatment and substances in the disinfection

space are not corroded, such that disinfection of precision instruments can also be accomplished.

Moreover, since the apparatus of the invention allows the formaldehyde gas to be supplied from the formaldehyde gas inlet while exhibiting a high disinfecting effect, it is possible to easily guarantee adequate disinfection of the interior spaces of artificial respirators.

In addition, the apparatus of the invention can prevent leakage of untreated formaldehyde gas outside of the chamber even when the volume of the gas in the chamber increases due to rising chamber temperature, while also adequately guaranteeing the disinfecting effect.

INDUSTRIAL APPLICABILITY

As explained above, the formaldehyde gas disinfection apparatus of the invention is suitable for disinfection to a degree which can adequately guarantee disinfection spaces.

- 28 -

CLAIMS

1. A formaldehyde gas disinfection apparatus comprising a housing provided with a formaldehyde gas generator which generates formaldehyde gas, a humidity regulator which regulates the humidity of said formaldehyde gas, a temperature regulator which regulates the temperature of said formaldehyde gas, a gas deliverer which delivers and introduces said formaldehyde gas into a disinfection space, a discharge gas treater which treats discharge gas from said disinfection space and a gas ejector which ejects said discharge gas, and provided with a controller which controls generation of said formaldehyde gas in said formaldehyde gas generator at a concentration within a specified range, controls the humidity of said formaldehyde gas within a specified range by said humidity regulator, controls the temperature of said formaldehyde gas within a specified range by said temperature regulator, controls the gas delivery rate by said gas deliverer within a specified range, controls the amount of formaldehyde in the discharge gas by said discharge gas treater within a specified range and controls the amount of discharge gas ejected by said gas ejector, and which controls the formaldehyde gas concentration, humidity and temperature in said disinfection space to 160 ppm or greater, 50-90% RH and 20-40°C, respectively, based on the values of the formaldehyde gas concentration, humidity and temperature in said disinfection

space from formaldehyde gas concentration, humidity and temperature monitors in said disinfection space.

2. A formaldehyde gas disinfection apparatus comprising a formaldehyde gas generator which generates formaldehyde gas, a humidity regulator which regulates the humidity of said formaldehyde gas, a temperature regulator which regulates the temperature of said formaldehyde gas, a gas deliverer which delivers and introduces said formaldehyde gas into a disinfection space, a discharge gas treater which treats discharge gas from said disinfection space and a gas ejector which ejects said discharge gas, and a controller which controls generation of said formaldehyde gas in said formaldehyde gas generator at a concentration within a specified range, controls the humidity of said formaldehyde gas within a specified range by said humidity regulator, controls the temperature of said formaldehyde gas within a specified range by said temperature regulator, controls the gas delivery rate by said gas deliverer within a specified range, controls the amount of formaldehyde in the discharge gas by said discharge gas treater within a specified range and controls the amount of discharge gas ejected by said gas ejector.

3. A formaldehyde gas disinfection apparatus characterized by being provided with a formaldehyde gas supply/ejection apparatus which supplies and ejects formaldehyde gas into and from a sealed chamber and a chamber pressure regulator which regulates the pressure in

- 30 -

said chamber, wherein said formaldehyde gas supply/ejection apparatus comprises a formaldehyde gas generator which generates said formaldehyde gas, a humidity regulator which regulates the humidity of said formaldehyde gas, a
5 temperature regulator which regulates the temperature of said formaldehyde gas, a gas deliverer which delivers and introduces said formaldehyde gas into a chamber, a discharge gas treater which treats discharge gas from said chamber, a gas ejector which ejects said discharge gas, and a
10 controller which controls the formaldehyde gas concentration, humidity and temperature in said chamber to a prescribed concentration, humidity and temperature, and said chamber pressure regulator comprises an air supply unit which supplies outside air into said chamber, a gas
15 discharge unit which discharges air in said chamber to the outside, pressure difference detector means which detects the pressure difference between the inside and outside of said chamber, control means which controls said air supply unit and said gas discharge unit based on a detected value
20 detected by said pressure difference detector means, and controlled state output means which outputs the controlled state of said chamber pressure based on said detected value detected by said pressure difference detector means.

4. A formaldehyde gas disinfection apparatus
25 according to claim 3, characterized in that said controller controls the formaldehyde gas concentration in said chamber to 160 ppm or greater based on the outputted value from a

- 31 -

formaldehyde gas concentration monitor provided in said chamber, controls the humidity in said chamber to 50-90% relative humidity based on the outputted value from a humidity monitor provided in said chamber, and controls the temperature in said chamber to 20-40°C based on the outputted value from a temperature monitor provided in said chamber.

5. A formaldehyde gas disinfection apparatus according to claim 3 or 4, characterized in that said gas discharge unit is provided with a treatment apparatus which treats gas discharged from said chamber.

- 32 -

ABSTRACT


A formaldehyde gas disinfection apparatus comprising a housing 10 provided with a formaldehyde gas generator 36, a humidity regulator 32 which regulates the humidity of the formaldehyde gas, a temperature regulator 34 which regulates the temperature, a gas deliverer which introduces the formaldehyde gas into a disinfection space, a discharge gas treater 36 which treats discharge gas from the disinfection space and a gas ejector which ejects the discharge gas, the apparatus having a controller 24 which controls generation of the formaldehyde gas in the formaldehyde gas generator at a concentration within a specified range, controls the humidity of the formaldehyde gas within a specified range by the humidity regulator, controls the temperature of the formaldehyde gas within a specified range by the temperature regulator, controls the gas delivery rate by the gas deliverer within a specified range, controls the amount of formaldehyde in the discharge gas by the discharge gas treater within a specified range and controls the amount of discharge gas ejected by the gas ejector, wherein the formaldehyde gas concentration, humidity and temperature in the disinfection space are controlled to 160 ppm or greater, 50-90% relative humidity and 20-40°C, respectively, based on the values of the formaldehyde gas concentration, humidity and temperature in the disinfection space from formaldehyde gas concentration,

- 33 -

humidity and temperature monitors 12, 14, 16 in the
disinfection space.


10/089604

Fig. 1

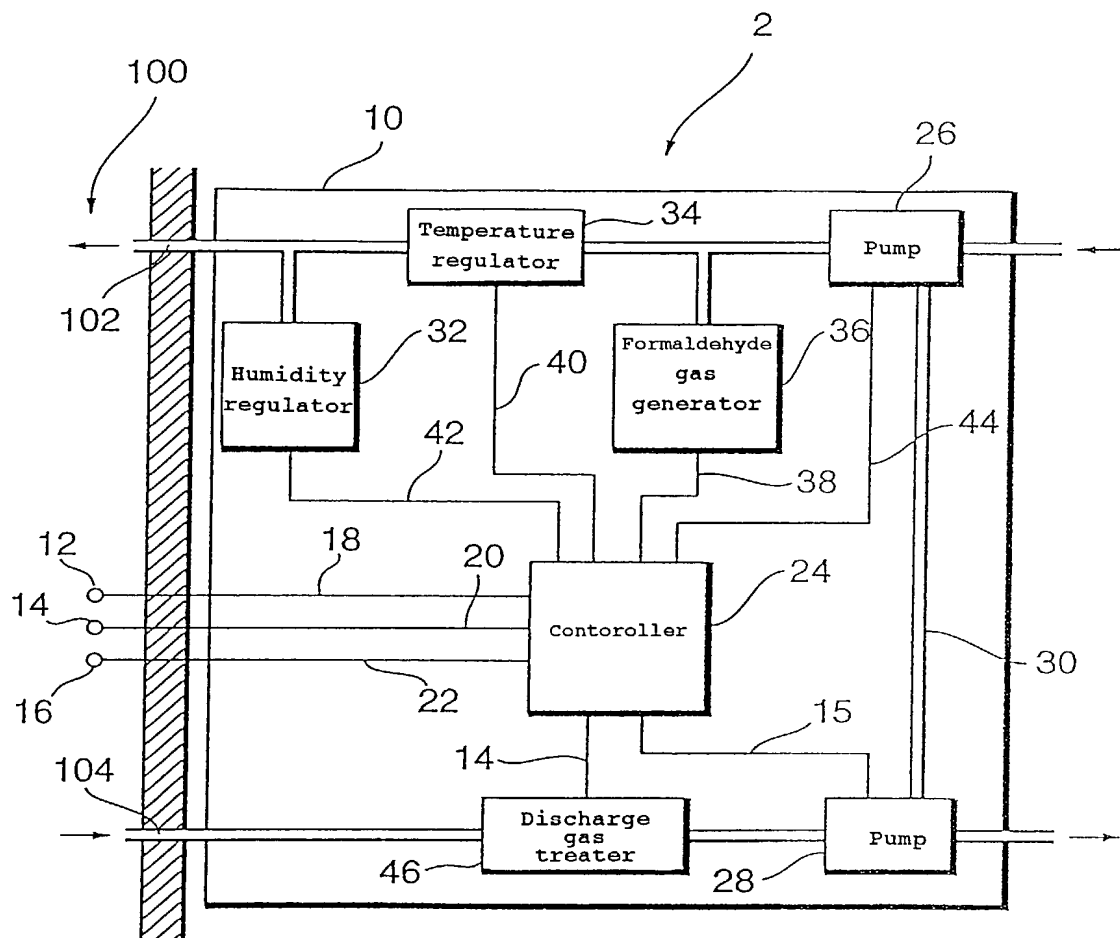


10/089604

Fig. 2

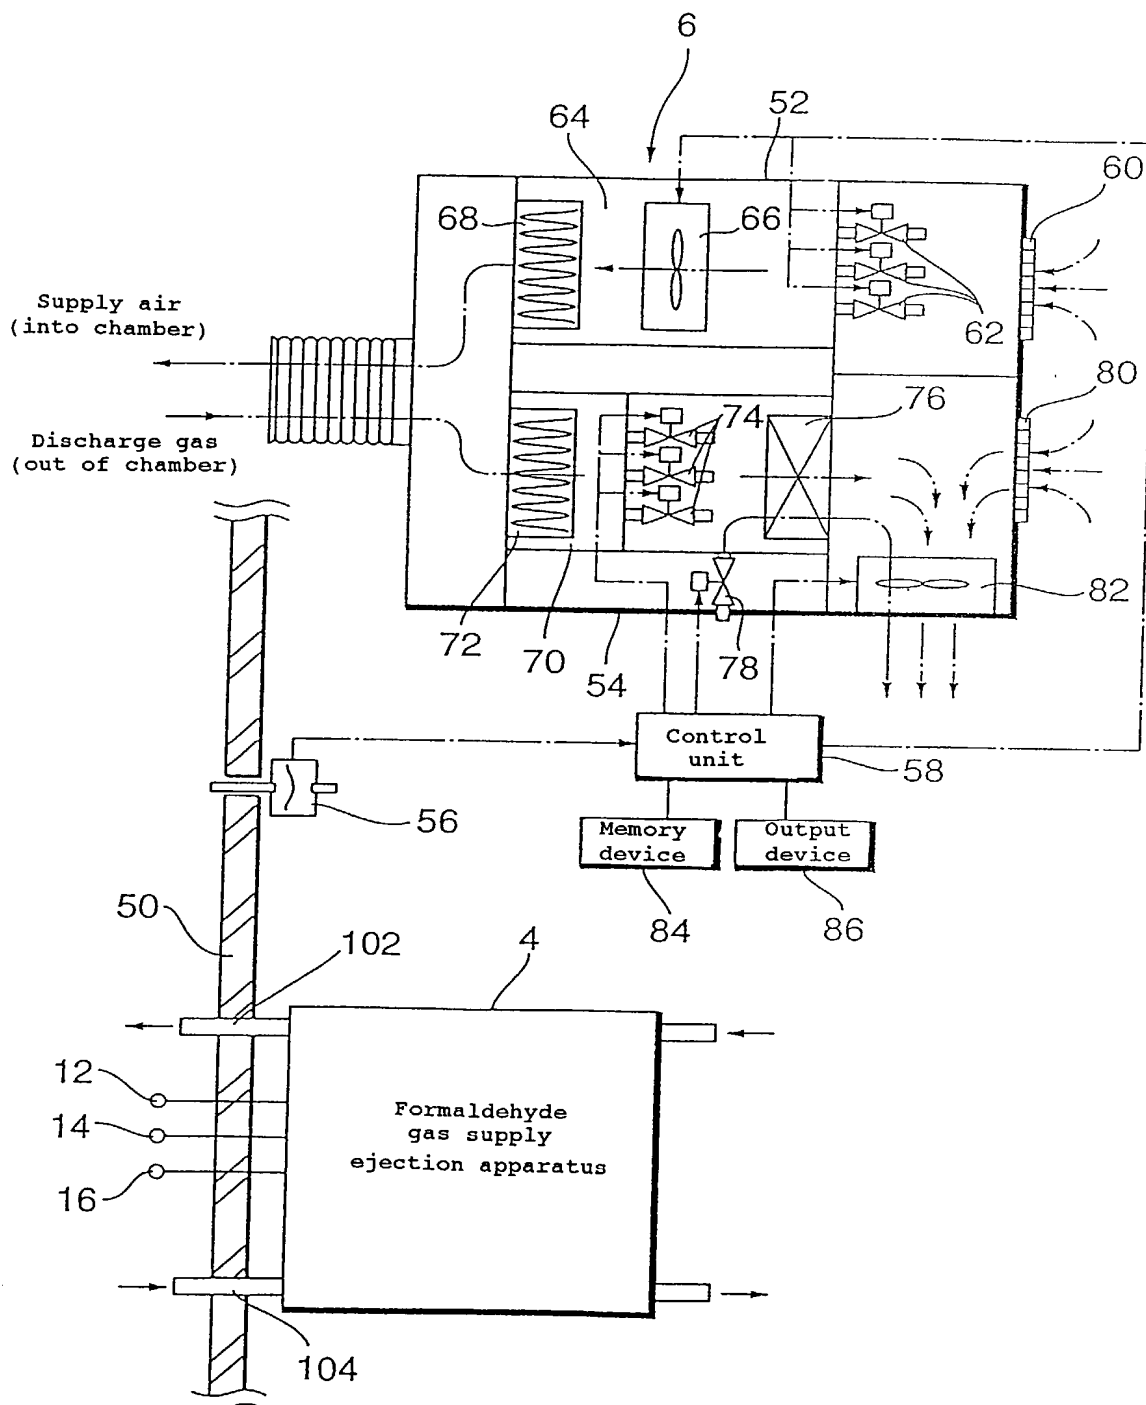

10/089604

Fig. 3

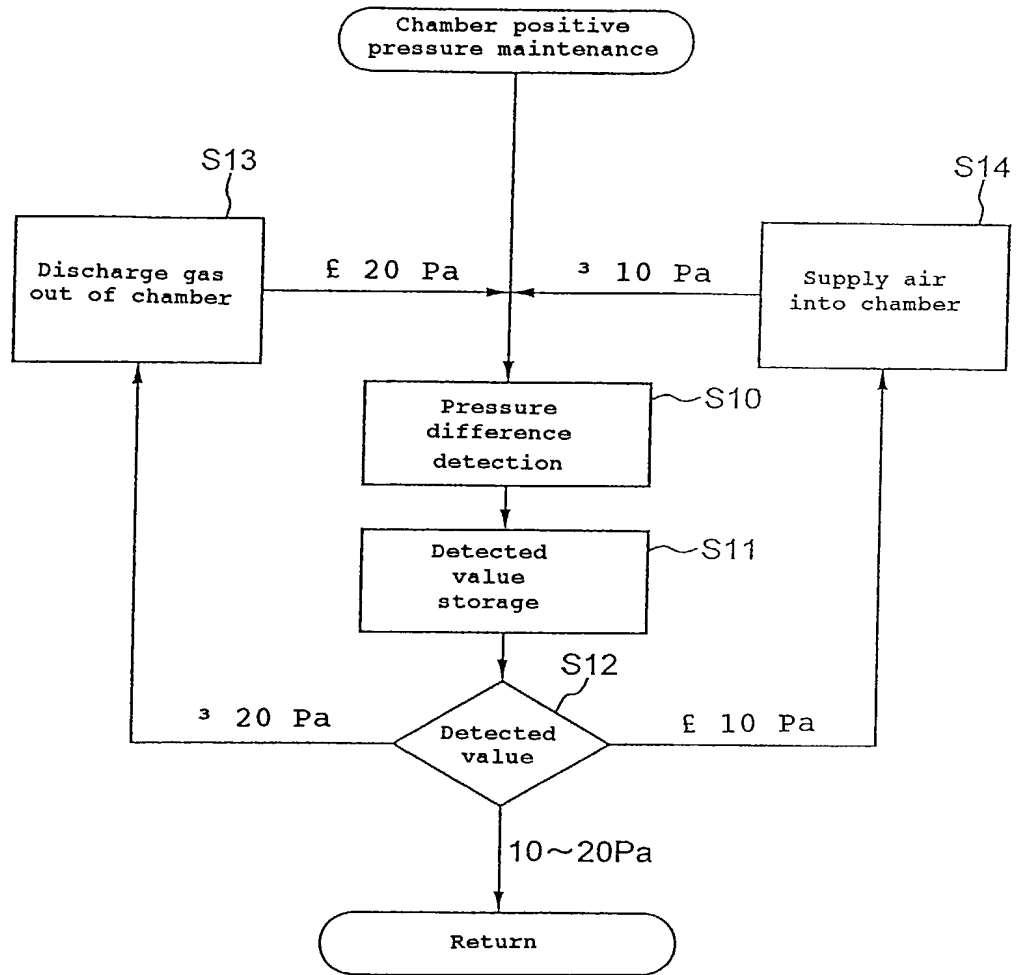

DECLARATION AND POWER OF ATTORNEY FOR U.S. PATENT APPLICATION

米国特許出願宣言書及び委任状
Japanese Language Declaration
日本語宣言書 (英語でご記入下さい)

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

下記の氏名の発明者として、私は以下の通り宣言します。私の住所、郵便物送付先、国籍は下記の私の氏名の後に記載された通りです。下記の名称の発明に関して請求の範囲に記載され、特許出願している発明内容について、私が最先かつ唯一の発明者（下記の氏名が一つの場合）もしくは最先かつ共同の発明者（下記の氏名が複数の場合）であると信じています。

Title (発明の名称) : FORMALDEHYDE GAS STERILIZER

of which is described and claimed in:

上記名称の発明を記述し特許請求する書類は、以下のいずれかです。

- () the attached specification, or
 本状に添付した明細書
- () the specification in the application Serial No. _____ filed _____;
 (上記日付) 提出の米国出願番号 (上記出願番号) で、
 and with amendments through _____ (if applicable), or
 (該当する場合) (上記日付等) に訂正された明細書
- (x) the specification in International Application No. PCT/ JP00/06990 , filed October 06, 2000 ,
 and as amended on _____ (if applicable).
 (上記日付) 提出の特許協力条約に基づく国際出願番号PCT/ (上記出願番号) で、
 (該当する場合) (上記日付等) に訂正された明細書

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above.

私は、特許請求の範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許性の有無について重要な情報を開示する義務があることを認めます。

I hereby claim priority benefits under Title 35, United States Code, §119 (and §172 if this application is for a Design) of any application(s) for patent or inventor's certificate listed below and have also identified below any application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

私は、米国法典第35編119条（もし本願が意匠に関する出願の場合は172条）に基づき、下記の特許出願又は発明者証の出願についての優先権の利益をここに主張するとともに、優先権主張の基礎となる出願日を有する、本出願の前に出願された特許または発明者証の出願を以下にすべて、枠内をマークすることで示しています。

COUNTRY 国名	APPLICATION NO. 出願番号	DATE OF FILING 出願日	PRIORITY CLAIMED 優先権主張
JAPAN	11-288429	October 08, 1999	YES
JAPAN	2000-171795	June 08, 2000	YES

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or 365(c) of any PCT international application designating the United States listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which become available between the filing date of the prior application and the national or PCT international filing date of this application:

私は、米国法典第35編120条に基づいて下記の特許出願、又は米国を指定している特許協力条約365条(c)に基づく優先権をここに主張

します。また、本出願の各請求の範囲の技術的事項が米国法典第35編112条第1段で規定された方法で先行する米国特許出願に開示されていない限り、当該先行出願の出願日以降で本出願の国内又はPCTに基づく国際出願の提出日までの期間中に入手できるようになった、連邦規則法典第37編1条56項で定義された特許性の有無に関する重要な情報について、開示義務があることを認識しています。

APPLICATION SERIAL NO. 出願番号	U.S. FILING DATE 米国出願日	STATUS: PATENTED, PENDING, ABANDONED 現状:特許許可済、係属中、放棄済

I further declare that all statements made herein of my own knowledge are true, and that all statements on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

私は、私自身の知識に基づいて本宣言書中で私が行う表明が真実であり、かつ私の入手した情報と私の信じるところに基づく表明がすべて真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

And I hereby appoint Michael R. Davis, Reg. No. 25,134; Matthew M. Jacob, Reg. No. 25,154; Jeffrey Nolton, Reg. No. 25,408; Warren M. Cheek, Jr., Reg. No. 33,367; Nils E. Pedersen, Reg. No. 33,145; and, Charles R. Watts, Reg. No. 33,142, who together constitute the firm of WENDEROTH, LIND & PONACK, L.L.P., jointly and severally, attorneys to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

私は、本出願に関する一切の手続きを米特許商標局に対して遂行する弁護士として、共同でWENDEROTH, LIND & PONACK, L.L.P.法律事務所を構成しているMichael R. Davis（登録番号第25,134号）、Matthew M. Jacob（登録番号第25,154号）、Jeffrey Nolton（登録番号第25,408号）、Warren M. Cheek, Jr.（登録番号第33,367号）、Nils E. Pedersen（登録番号第33,145号）及びCharles R. Watts（登録番号第33,142号）を指名いたします。

I hereby authorize the U.S. attorneys named herein to accept and follow instructions from _____

as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and myself. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys named herein will be so notified by me.

私は、本願に関して米国特許商標局で行われるあらゆる手続行為に関し、ここに指名した米国弁護士を、弁護士と私との間で直接連絡をとることなく、（米国弁護士が連絡する相手先、譲受人もしくは日本の代理人等）からの指示を受けそれに従うことを、ここに承認します。指示を送る者を変更する場合は、その旨を上記米国弁護士は私から告知されます。

Direct Correspondence to
書類送付先

WENDEROTH, LIND & PONACK, L.L.P.
2033 K Street, N.W., Suite 800
Washington, D.C. 20006

Telephone (202) 721-8200
Facsimile (202) 721-8250
電話番号・FAX番号

Full Name of First Inventor 第一発明者の氏名	FAMILY NAME 姓 <u>HASHIBA</u>	FIRST GIVEN NAME 氏名 <u>Tomohiko</u>	SECOND GIVEN NAME ミドルネーム等その他の氏名
Residence & Citizenship 居住地及び国籍	CITY 市 <u>Minato-ku</u>	STATE OR COUNTRY 州又は国名 <u>Japan</u>	COUNTRY OF CITIZENSHIP 国籍 <u>Japan</u>
Post Office Address 郵便物送付先	ADDRESS 住所 <u>c/o BIO MEDIA CO., LTD.</u> <u>Matsushita Bldg., 4-25, Hamamatsu-cho 2-chome, Minato-ku, Tokyo, Japan</u>	CITY 市	STATE OR COUNTRY 州又は国名 ZIP CODE 郵便番号
Full Name of Second Inventor 第二発明者の氏名	FAMILY NAME 姓	FIRST GIVEN NAME 氏名	SECOND GIVEN NAME ミドルネーム等その他の氏名
Residence & Citizenship 居住地及び国籍	CITY 市	STATE OR COUNTRY 州又は国名	COUNTRY OF CITIZENSHIP 国籍
Post Office Address 郵便物送付先	ADDRESS 住所	CITY 市	STATE OR COUNTRY 州又は国名 ZIP CODE 郵便番号

Full Name of Third Inventor 第三発明者の氏名	FAMILY NAME 姓	FIRST GIVEN NAME 氏	SECOND GIVEN NAME ミドルネーム等その他の氏名
Residence & Citizenship 居住地及び国籍	CITY 市	STATE OR COUNTRY 州又は国名	COUNTRY OF CITIZENSHIP 国籍
Post Office Address 郵便物送付先	ADDRESS 住所	CITY 市	STATE OR COUNTRY 州又は国名
			ZIP CODE 郵便番号
Full Name of Fourth Inventor 第四発明者の氏名	FAMILY NAME 姓	FIRST GIVEN NAME 氏	SECOND GIVEN NAME ミドルネーム等その他の氏名
Residence & Citizenship 居住地及び国籍	CITY 市	STATE OR COUNTRY 州又は国名	COUNTRY OF CITIZENSHIP 国籍
Post Office Address 郵便物送付先	ADDRESS 住所	CITY 市	STATE OR COUNTRY 州又は国名
			ZIP CODE 郵便番号
Full Name of Fifth Inventor 第五発明者の氏名	FAMILY NAME 姓	FIRST GIVEN NAME 氏	SECOND GIVEN NAME ミドルネーム等その他の氏名
Residence & Citizenship 居住地及び国籍	CITY 市	STATE OR COUNTRY 州又は国名	COUNTRY OF CITIZENSHIP 国籍
Post Office Address 郵便物送付先	ADDRESS 住所	CITY 市	STATE OR COUNTRY 州又は国名
			ZIP CODE 郵便番号
Full Name of Sixth Inventor 第六発明者の氏名	FAMILY NAME 姓	FIRST GIVEN NAME 氏	SECOND GIVEN NAME ミドルネーム等その他の氏名
Residence & Citizenship 居住地及び国籍	CITY 市	STATE OR COUNTRY 州又は国名	COUNTRY OF CITIZENSHIP 国籍
Post Office Address 郵便物送付先	ADDRESS 住所	CITY 市	STATE OR COUNTRY 州又は国名
			ZIP CODE 郵便番号
Full Name of Seventh Inventor 第七発明者の氏名	FAMILY NAME 姓	FIRST GIVEN NAME 氏	SECOND GIVEN NAME ミドルネーム等その他の氏名
Residence & Citizenship 居住地及び国籍	CITY 市	STATE OR COUNTRY 州又は国名	COUNTRY OF CITIZENSHIP 国籍
Post Office Address 郵便物送付先	ADDRESS 住所	CITY 市	STATE OR COUNTRY 州又は国名
			ZIP CODE 郵便番号
Full Name of Eighth Inventor 第八発明者の氏名	FAMILY NAME 姓	FIRST GIVEN NAME 氏	SECOND GIVEN NAME ミドルネーム等その他の氏名
Residence & Citizenship 居住地及び国籍	CITY 市	STATE OR COUNTRY 州又は国名	COUNTRY OF CITIZENSHIP 国籍
Post Office Address 郵便物送付先	ADDRESS 住所	CITY 市	STATE OR COUNTRY 州又は国名
			ZIP CODE 郵便番号

Full Name of Ninth Inventor 第九発明者の氏名	FAMILY NAME 姓名	FIRST GIVEN NAME 氏名	SECOND GIVEN NAME ミドルネーム等その他の氏名
Residence & Citizenship 居住地及び国籍	CITY 市	STATE OR COUNTRY 州又は国名	COUNTRY OF CITIZENSHIP 国籍
Post Office Address 郵便物送付先	ADDRESS 住所	CITY 市	STATE OR COUNTRY 州又は国名
			ZIP CODE 郵便番号

Full Name of Tenth Inventor 第十発明者の氏名	FAMILY NAME 姓名	FIRST GIVEN NAME 氏名	SECOND GIVEN NAME ミドルネーム等その他の氏名
Residence & Citizenship 居住地及び国籍	CITY 市	STATE OR COUNTRY 州又は国名	COUNTRY OF CITIZENSHIP 国籍
Post Office Address 郵便物送付先	ADDRESS 住所	CITY 市	STATE OR COUNTRY 州又は国名
			ZIP CODE 郵便番号

1st Inventor Tomohiko HASHIBA
 第一発明者 (署名、ローマ字もしくは漢字) Tomohiko HASHIBA

Date 4 March, 2002
 署名の日付

2nd Inventor _____
 第二発明者 (署名、ローマ字もしくは漢字)

Date _____
 署名の日付

3rd Inventor _____
 第三発明者 (署名、ローマ字もしくは漢字)

Date _____
 署名の日付

4th Inventor _____
 第四発明者 (署名、ローマ字もしくは漢字)

Date _____
 署名の日付

5th Inventor _____
 第五発明者 (署名、ローマ字もしくは漢字)

Date _____
 署名の日付

6th Inventor _____
 第六発明者 (署名、ローマ字もしくは漢字)

Date _____
 署名の日付

7th Inventor _____
 第七発明者 (署名、ローマ字もしくは漢字)

Date _____
 署名の日付

8th Inventor _____
 第八発明者 (署名、ローマ字もしくは漢字)

Date _____
 署名の日付

9th Inventor _____
 第九発明者 (署名、ローマ字もしくは漢字)

Date _____
 署名の日付

10th Inventor _____
 第十発明者 (署名、ローマ字もしくは漢字)

Date _____
 署名の日付

The above application may be more particularly identified as follows:
 上記出願は、さらに具体的には以下のように特定されます。

U.S. Application Serial No. _____ Filing Date _____
 (上記出願日) 提出の米国特許出願第 (上記出願番号) 号

Applicant Reference Number _____ Atty Docket No. _____
 出願人側整理番号 (上記番号) 米国弁護士側管理番号 (上記番号)

Title of Invention _____
 発明の名称